arXiv:1210.0486v1 [quant-ph] 1 Oct 2012

On the relation between semi and fully device independent protocols

Hong-Wei Li[1,4,5], Piotr Mironowicz[2,6], Marcin Pawłowski[3,2], Zhen-Qiang Yin[1], Yu-Chun Wu[1], Shuang Wang[1], Wei Chen[1], Hong-Gang Hu[4], Guang-Can Guo[1], Zheng-Fu Han[1]

[1]*Key Laboratory of Quantum Information,University of Science and Technology of China,Hefei, 230026, China*
[2] *Instytut Fizyki Teoretycznej i Astrofizyki, Uniwersytet Gdański, PL-80-952 Gdańsk, Poland*
[3] *Department of Mathematics, University of Bristol, Bristol BS8 1TW,United Kingdom*
[4] *Department of Electronic Engineering and Information Science,*
University of Science and Technology of China, Hefei, 230027, China
[5] *Zhengzhou Information Science and Technology Institute, Zhengzhou, 450004, China*
[6] *Department of Microwave and Antenna Engineering,*
Faculty of Electronics, Telecommunications and Informatics,
Gdansk University of Technology, Gdansk 80-233, Poland

We study the relation between semi and fully device independent protocols. Our work leads to new random number generating protocols with higher rates for both scenarios. As a tool we use the correspondence between Bell inequalities and dimension witnesses. We present a method for converting the former into the later and vice versa. As a byproduct we obtain whole new classes of inequalities and witnesses. Finally, we show how optimization methods used in the studies of Bell inequalities can be adopted for dimension witnesses.

Introduction - In the device independent (DI) protocols the parties do not know all the relevant parameters of their machines or do not trust them. It was formally presented in [1]. First this approach has been very successful in the quantum cryptography [2–5]. Later Colbeck [6, 7] has proposed the true random number expansion protocol based on the GHZ test and Pironio *et al.* [8] have proposed the protocol based on the Bell inequality violations. All these protocols require entanglement which has the negative effect on the complexity of the devices and the rates of the randomness generation [8].

To cope with this problem the semi-device independent(SDI) scenario was introduced in [9]. In this approach we consider prepare and measure protocols without making any assumptions about the inner workings of the preparation and measurement devices. The only assumption made is about the size of the communicated system. In each round of the experiment we assume it to be a single qubit. This approach is a very good compromise between the fully DI scenario and and the experimental feasibility. The first SDI protocol, presented in [9], was for quantum key distribution. Shortly afterwards, the first SDI randomness expansion protocol has been proposed [10].

In this work study the connection between DI and SDI protocols. We show how and under which conditions one can be converted into the other and how this change affects their parameters.

Our paper is structured as follows. First we describe the method for converting DI protocols to SDI and vice versa. Then we apply our method to SDI randomness generators to obtain new DI protocols with higher bit rates. We also present a new family of Bell inequalities. Next we go the other way round and take DI protocol and turn it into SDI one again with better rates. This time our byproduct is a new family of dimension witnesses. Finally, we show how semi definite programming (SDP) methods that are a powerful tool in DI scenario can be used in the SDI one.

Bell inequalities and dimension witnesses - In DI protocol the parties receive systems in an unknown entangled state from an untrusted sender. In each round they choose their inputs and make measurements to obtain the outcomes. In our paper we are interested with bi-partite protocols, so we have two partners: Alice (with her setting choice denoted by x and the outcome by a) and Bob (with y and b respectively). In some, randomly chosen, rounds of the protocol both parties will publicly compare their settings and outcomes to estimate the conditional probability distribution $P(a,b|x,y)$. From this they calculate the value of some Bell inequality

$$I=\sum_{a,b,x,y}\alpha_{a,b,x,y}P(a,b|x,y), \qquad (1)$$

which is their security parameter. This parameter can be then used to lowerbound the amount of randomness or secrecy in the remaining rounds.

In SDI protocol Alice chooses her input x' but she does not have any outcome. Instead, in each round she prepares a state depending on x' and sends it to Bob. Bob chooses measurement setting y and obtains the outcome b. The devices that prepare the system and then measure it are not trusted but we assume that the communicated states are described by Hilbert space with a fixed dimension (here we assume they are qubits) and that there is no entanglement between the devices of Alice and Bob. Again in some rounds x', y and b are announced to estimate the value of some dimension witness

$$W=\sum_{b,x',y}\beta_{b,x',y}P(b|x',y), \qquad (2)$$

which has exactly the same function as I in the DI case. Both these scenarios are sketched in Fig. 1.

Dimension witnesses have been introduced in [11]. Just as violation of Bell inequality, in DI case tells us that the

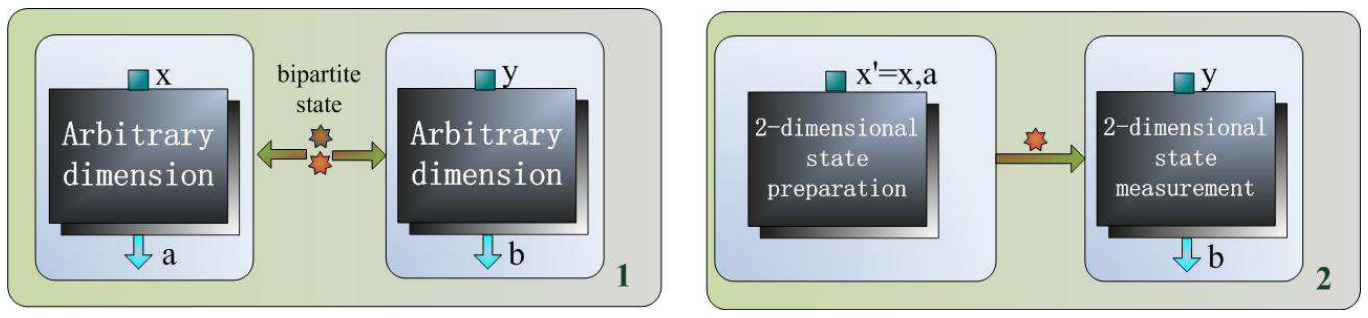

FIG. 1: Schematic representation of DI (1) and SDI (2) protocols and our method of finding the corresponding ones.

measured system cannot have a classical description the violation of dimension witness, in SDI case tells us that the communicated system cannot be a classical bit (in the case of the witness for dimension 2). In both cases the violation of the classical bounds is necessary (though not always sufficient) condition for the protocol to work. And in both of the cases the form of I or W are the most important part of the protocol's description. Therefore, finding correspondence between these two objects is equivalent to finding correspondence between the protocols. Our method of doing so is quite straightforward.

Let's rewrite I as $\sum_{a,b,x,y} \alpha_{a,b,x,y} P(a|x,y) P(b|a,x,y)$ and start considering a as a part of Alice's input. This is purely mathematical operation, it has no meaning at the level of protocol. Now Alice's input is $x' = (x,a)$. We can consider $P(a|x,y)$ as the probability of part of Alice's input to be a. Because in the parameter estimation phase of the protocol the inputs are chosen according to uniform distribution we put $P(a|x,y) = \frac{1}{A}$ where A is the size of the alphabet of a. Our I now is $\sum_{b,x',y} \alpha_{b,x',y} \frac{1}{A} P(b|x',y)$ and has the form of (2) with $\beta_{b,x',y} = \frac{1}{A}\alpha_{b,x',y}$. Our method is quite heuristic and there is no guarantee that a Bell inequality with quantum bound higher than classical will lead to a dimension witness that can be violated. Also using it to go from dimension witness to Bell inequality is not always possible. To do so one has to divide Alice's input x' into a pair: setting and outcome. This is only possible if the alphabet of x' has composite size. These are serious drawbacks but they are easily outweighed by the advantages: it's simple and it works! In the following paragraphs we apply it to generate new useful witnesses, inequalities and protocols.

From SDI to DI protocols - Let us consider the family of SDI protocols for randomness generation introduced in [12], which are based on $n \to 1$ quantum random access codes [13]. Alice's input x' is a collection of n independent bits $a_0, ..., a_{n-1}$. For Bob $y = 0, .., n-1$. The dimension witness is defined by $\beta_{b,x',y} = \delta_{a_y,b}$. There are many ways of dividing Alice's input into the pair of settings and outcomes, but because of the independence of the bits, they are all equivalent. Let us then take the outcome a to be a_0 and the setting x to be $a_1, ..., a_{n-1}$. In this way we obtain the new family of Bell inequalities

$$I_n = \sum_{a,b,x,y} \delta_{a_y,b} P(a,b|y,x). \tag{3}$$

Systems obtaining high value of I_n can be used to implement entanglement assisted random access codes [14]. In these codes Alice has n independent bits and Bob is interested in only one of them. Alice can send to Bob only one bit of classical communication but they can share entanglement. If we denote the bits that Alice want to encode by $c_0, ..., c_{n-1}$. Then Alice can choose her setting by taking $a_i = c_i \oplus c_0$ for all $i > 0$ and transmit the message $m = a \oplus c_0$ to Bob. If he XORs his outcome b with the message it is easy to calculate that he obtains the correct value of a_y with average probability $P_n = \frac{I_n}{n2^n}$. Therefore, we see that there indeed exists a correspondence between the dimension witness and Bell inequalities related by our method also at the level of protocols. In this case they both are a measure of success probability in different kinds of random access codes.

I_2 is equivalent to CHSH inequality. However, the members of this family for $n > 2$ have never been studied. Because it is possible to use them for entanglement assisted random access codes, the bound on their efficiency derived in [14] apply and, they translate to maximum quantum value of P_n to be $P_n^{max} = \frac{1}{2}\left(1 + \frac{1}{\sqrt{n}}\right)$.

Now let us see how our new Bell inequalities perform in DI randomness generation. The quantity that we want to optimize is the min-entropy $H_\infty(a,b|x,y) = -\log \max_{a,b} P(a,b|x,y)$. To lowerbound its amount for a given value of P_n we use the methods described in [15]. More precisely, we bound the set of allowed probability distributions by the second level of their hierarchy. We have obtained the following lower bounds on the min-entropy for the maximal quantum values of P_n:

n	DI: $H_\infty(a,b\|x,y)$	SDI: $H_\infty(b\|x,y)$
2	1.2284	0.2284
3	1.3421	0.3425
4	1.4126	0.1388
5	1.4652	0.1024

TABLE I: Lower bounds on min-entropy $H_\infty(a,b|x,y)$ for the maximal quantum values of Bell inequalities I_n obtained using semi definite programming. They are compared to the bounds on the SDI protocols from [12], from which they were derived.

Comparing to the randomness obtained from the SDI protocols the main difference is that it grows with n instead of reaching maximum at $n = 3$. In fact the upper bound is $H_\infty(a,b|x,y) = 1 - \log P_n^{max} = 2 - \log\left(1 + \frac{1}{\sqrt{n}}\right)$, which goes to 2 as $n \to \infty$. We conjecture it is reached for any n but the second level of the SDP hierarchy form [15] that we use for the lower bound is sufficient only for $n = 2$. Proving this conjecture is one of the open avenues of research. The lower bounds as the function of P_n are plotted in Fig. 2.

From DI to SDI protocols - Now we apply our method to convert DI protocol to SDI one. We start from the randomness generation protocol form [16] based on Bell inequality I_α, which expressed in the form (1) is

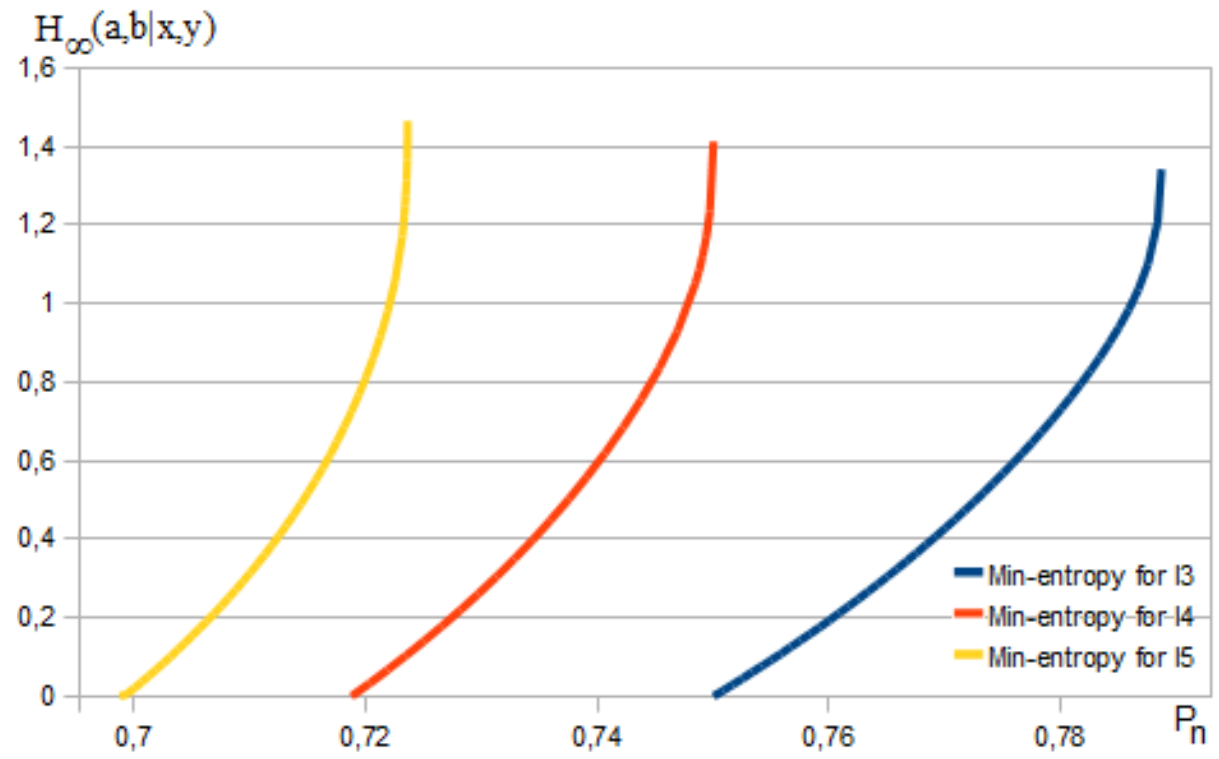

FIG. 2: The lower bounds on $H_\infty(a,b|x,y)$ as the function of P_n.

$$\begin{aligned} I_\alpha = &\textstyle\sum_{a,b,y}\delta_{a,b}\alpha P(a,b|x=0,y) \\ &+\textstyle\sum_{a,b,y}\delta_{a,b\oplus y}P(a,b|x=1,y). \end{aligned} \tag{4}$$

Converting it to dimension witness we get

$$\begin{aligned} W_\alpha = &\textstyle\sum_{a,b,y}\frac{\alpha\delta_{a,b}}{2}P(b|a,x=0,y) \\ &+\textstyle\sum_{a,b,y}\frac{\delta_{a,b\oplus y}}{2}P(b|a,x=1,y). \end{aligned} \tag{5}$$

The lower bound on min-entropy as a function of coefficient α is plotted in Fig. 3. For large values of α the amount of randomness is clearly greater than for the best of the protocols described in [12].

Previously [10, 12], the bounds on entropy in SDI protocols have been obtained with Levenberg−Marquardt algorithm[17] which is not guaranteed to find global minima. SDP on the other hand always finds it but it was not known how it could be applied in SDI case. Below we give a solution to the problem.

Optimization in SDI protocols - It is not possible to use SDP optimization in SDI case directly because of the nonlinear target function. Methods from [15] also cannot be applied because they do not allow for choosing the dimension of the system. Therefore, we need to find another solution. It is sketched in Fig 4.

Every SDI protocol can be realized in the following way. Alice has a pair of systems in a singlet state. If she wants to prepare the state $|\phi\rangle$, she measures one particle in the basis $\{|\phi\rangle, |\phi^\perp\rangle\}$ the other will also collapse to one of these states. Basing on her measurement outcome she either sends the other particle to Bob unchanged or performs unitary that flips $|\phi\rangle$ to $|\phi^\perp\rangle$ and then sends it. If the Bob's measurement outcomes are binary Alice does not have to perform this unitary at all. She can just send her measurement outcome to Bob (0 meaning $|\phi\rangle$ and 1 standing for $|\phi^\perp\rangle$) who after XORing it with his outcome will get exactly the same probability distribution $P(b|a,x,y)$ as in the initial SDI protocol. These two cases are marked by letters (A) and (B) in Fig. 4.

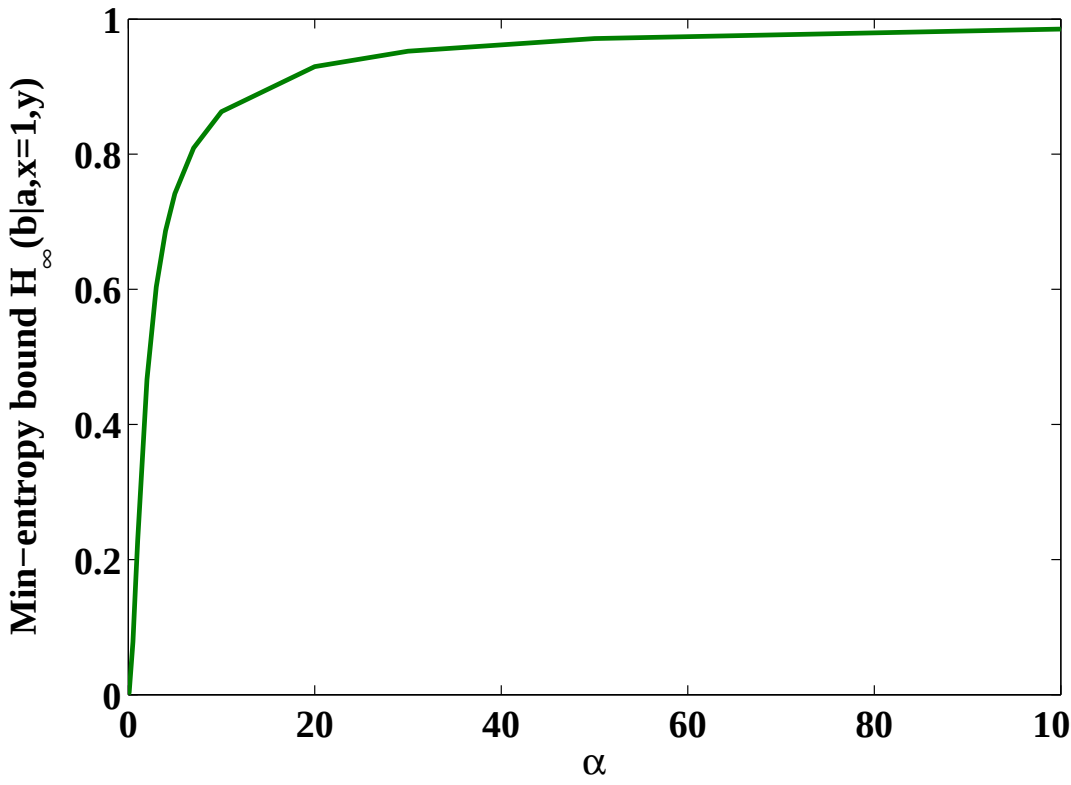

FIG. 3: The lower bound on min-entropy $H_\infty(b|a,x=1,y)$ as a function of coefficient α for the maximal quantum value of W_α. In [16] large amount of randomness is generated only for one setting x. Here we observe the same result for with large randomness for $x=1$ and low for $x=0$.

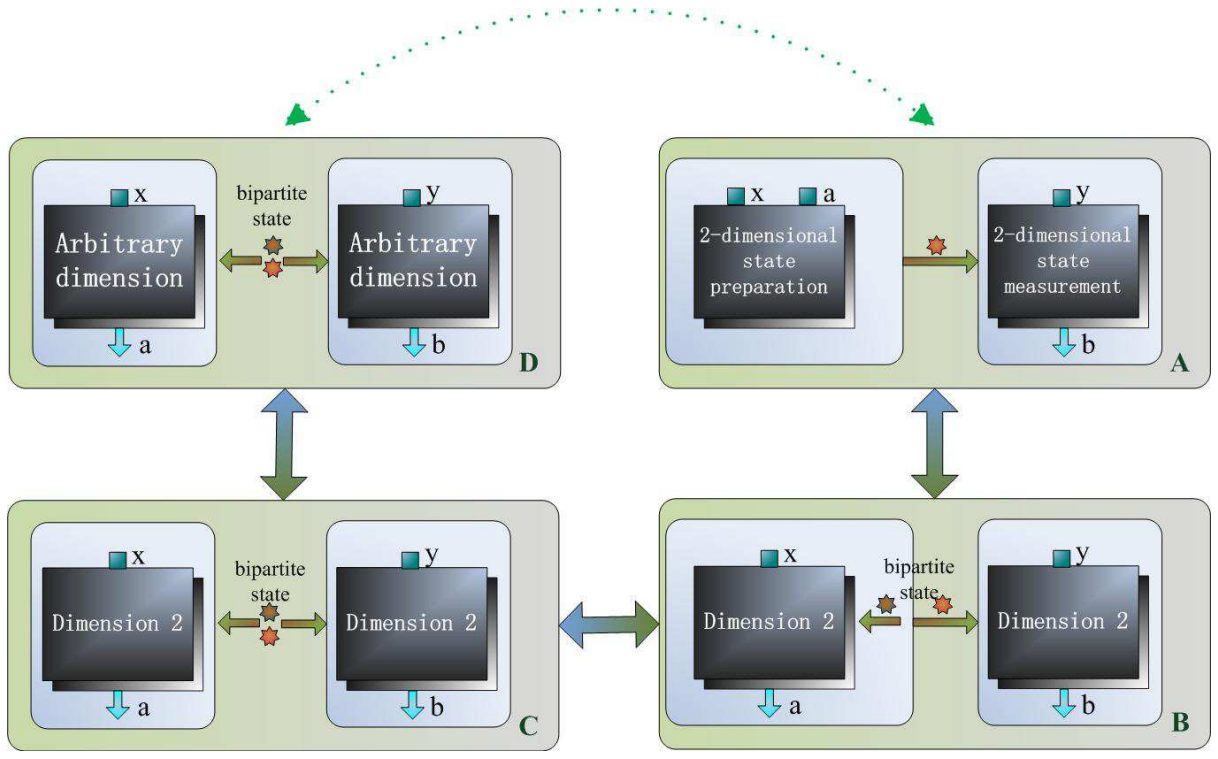

FIG. 4: The sketch of the method for lowerbounding the entropy in SDI protocols with SDP. See text for detailed description.

Obviously, nothing changes if the source of the singlet states is outside Alice's lab and she is only the receiver of one subsystem just like Bob. This is depicted in fragment (C). But a lot changes if we now assume that the state that they receive can be arbitrary maximally entangled state of any dimension (D). However, this only enlarges the space of allowed probability distributions $P(b|a,x,y)$, so any lower bound on the entropy in case (D) will also hold in (A). Finally, (D) is just the description of DI protocol with some additional assumption on the state. We can lowerbound the entropy in this case with the SDP-based methods from [15] and the fact that the state is maximally entangled will be reflected by adding the constraints $\forall_{x,y} P(a|x,y) = \frac{1}{2}$.

We now have

$$\begin{aligned} H_\infty^{(A)}(b|x,a,y) &\geq H_\infty^{(D)}(b|x,a,y) \\ &= -\log\max_b P^{(D)}(b|x,a,y), \end{aligned} \tag{6}$$

with $P^{(D)}(b|x,a,y) = \frac{P^{(D)}(a,b|x,y)}{P^{(D)}(a|x,y)} = 2P^{(D)}(a,b|x,y)$ it gives

$$H_\infty^{(A)}(b|x,a,y) \geq -1 - \log \max_b P^{(D)}(a,b|x,y) \geq H_\infty^{(D)}(a,b|x,y) - 1 \qquad (7)$$

The above formula implies that the randomness obtained in SDI protocol is greater form the one in its DI counterpart minus 1. Let us stress that (7) holds only when the value of the dimension witness and Bell inequality are the same. Let us take a look at table 2. again. For $n = 2$ we have equality $H_\infty(b|x,a,y) = H_\infty(a,b|x,y) - 1$. For $n = 3$ $H_\infty(b|x,a,y)$ is slightly larger than $H_\infty(a,b|x,y) - 1$. This most probably stems from the fact that the bound in the table is not tight for $n = 3$. In fact, the upper bound on $H_\infty(a,b|x,y)$ is exactly $H_\infty(b|x,a,y) + 1$. The situation changes for $n = 4, 5$. In these cases (7) does not seem to hold. This is because the values in the table are given for the maximal quantum values of witnesses and inequalities which, for $n = 4, 5$ are not the same. If we calculate the entropy bound for the DI case when the value of Bell inequality is equal to the maximal quantum value of the dimension witness then the values are in agreement with (7).

Using this method we were able to refine the results form [10]. They are presented in Fig. 5.

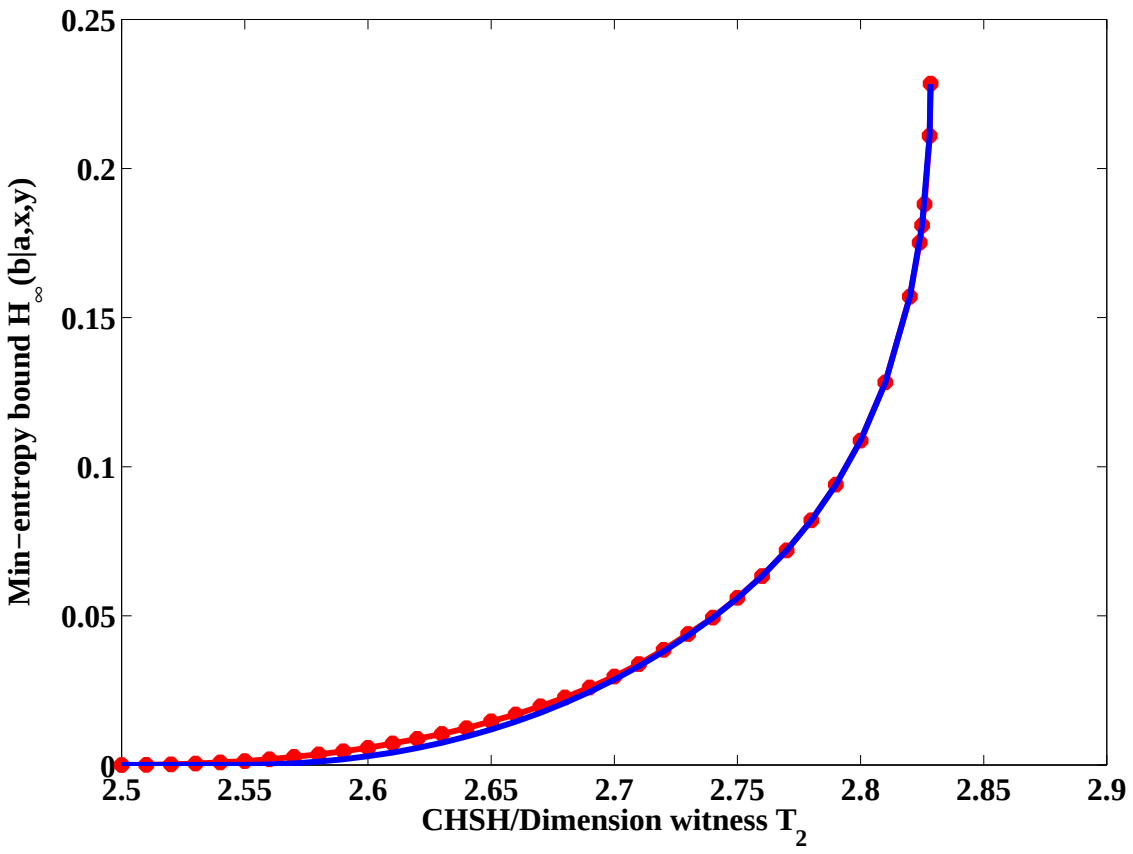

FIG. 5: Min-entropy bounds for SDI randomness generation protocol based on $2 \to 1$ quantum random access code. The red points are based on Levenberg−Marquardt algorithm used in [10] which is not guaranteed to find global minima, while the blue line is based on SDP method described here. Note that the state preparation in SDI protocol has the assumption $p(a|x,y) = \frac{1}{2}$.

Conclusions - We study the relation between DI and SDI protocols. Though we have focused on randomness generation our results also apply to quantum key distribution since all of the state-of-the-art proofs of security are based on the randomness of the measurement outcomes [3, 4]. To this end we have demonstrated a method of converting Bell inequalities into dimension witness and vice versa. This has allowed us to generate new examples of both types of the objects with very interesting properties. Our new family of Bell inequalities gives rise to DI randomness generation protocols with better bit rates. Our family of dimension witnesses does the same for the SDI protocols. Finally, using the correspondence between DI and SDI approach we were able to modify SDP-based methods which were proven successful in the former case to work in the later one.

Apart from similarities our studies have also shown interesting differences like the completely different dependance on n in Table 2. Also they have introduced many new protocols for both scenarios. Comparison of their efficiency with the existing ones, especially in the presence of noise and imperfect detectors, presents a new area of research.

Acknowledgements - H-W.L. thanks YaoYao for his helpful discussion. This work has been supported by National Natural Science Foundation of China (Grant NO. 61101137, 61201239, 61205118, 10974193 and 11275182), UK EPSRC, FNP TEAM and ERC grant QOLAPS. SDP has been implemented in MATLAB using toolboxes [18, 19].

[1] A. Acin, N. Brunner, N. Gisin, S. Massar, S. Pironio, and V. Scarani, Phys. Rev. Lett. **98**, 230501, (2007).

[2] J. Barrett, L. Hardy, A. Kent, Phys. Rev. Lett. **95**, 010503, (2005).

[3] E. Hänggi, R. Renner, arXiv/1009.1833, (2010). E. Hänggi, R. Renner, S. Wolf, EUROCRYPT 2010, pp. 216-234, (2010).

[4] Ll. Masanes, S. Pironio, A. Acin, Nat. Commun. **2**, 238, (2011).

[5] M. Dall'Arno, E. Passaro, R. Gallego, A. Acin arXiv:1207.2574

[6] R. Colbeck, A. Kent, Journal of Physics A: Mathematical and Theoretical, **44(9)**, 095305, (2011).

[7] R. Colbeck, *Quantum and relativistic prtocols for secure multi-party computation*, PHD Thesis, arXiv: 0911.3814, (2009).

[8] S. Pironio, A. Acin, S. Massar, A. Boyer de la Giroday, D. N. Matsukevich, P. Maunz, S. Olmschenk, D. Hayes, L. Luo, T. A. Manning, C. Monroe, Nature **464**, 1021, (2010).

[9] M. Pawłowski, N. Brunner, Phys. Rev. A **84**, 010302(R), (2011).

[10] H-W Li, Z-Q Yin, Y-C Wu, X-B Zou, S. Wang, W. Chen, G-C Guo, Z-F Han, Phys. Rev. A **84**, 034301, (2011).

[11] R. Gallego, N. Brunner, C. Hadley, A. Acin, Phys. Rev. Lett. **105**, 230501, (2010).

[12] H-W Li, M. Pawłowski, Z-Q Yin, G-C Guo, Z-F Han, Phys. Rev. A **85**, 052308, (2012)

[13] A. Ambainis, A. Nayak, A. Ta-Shma, U. Vazirani, Journal of the ACM, **49(4)**, 496, (2002).

[14] M. Pawłowski, M. Żukowski, Phys. Rev. A **81**, 042326 (2010).

[15] M. Navascus, S. Pironio, A. Acn, New Journal of Physics **10**, 073013 (2008).

[16] A. Acin, S. Massar, and S. Pironio, Phys. Rev. Lett. 108, 100402 (2012).

[17] K. Levenberg. Quarterly of Applied Mathematics 2: 164−168 (1944).

[18] J. Sturm, SeDuMi, a MATLAB Toolbox for Optimization Over Symmetric Cones Online at http://sedumi.mcmaster.ca.

[19] J. Löfberg, Yalmip: A Toolbox for Modeling and Optimization in MATLAB Online at http://control.ee.ethz.ch/ joloef/yalmip.php.